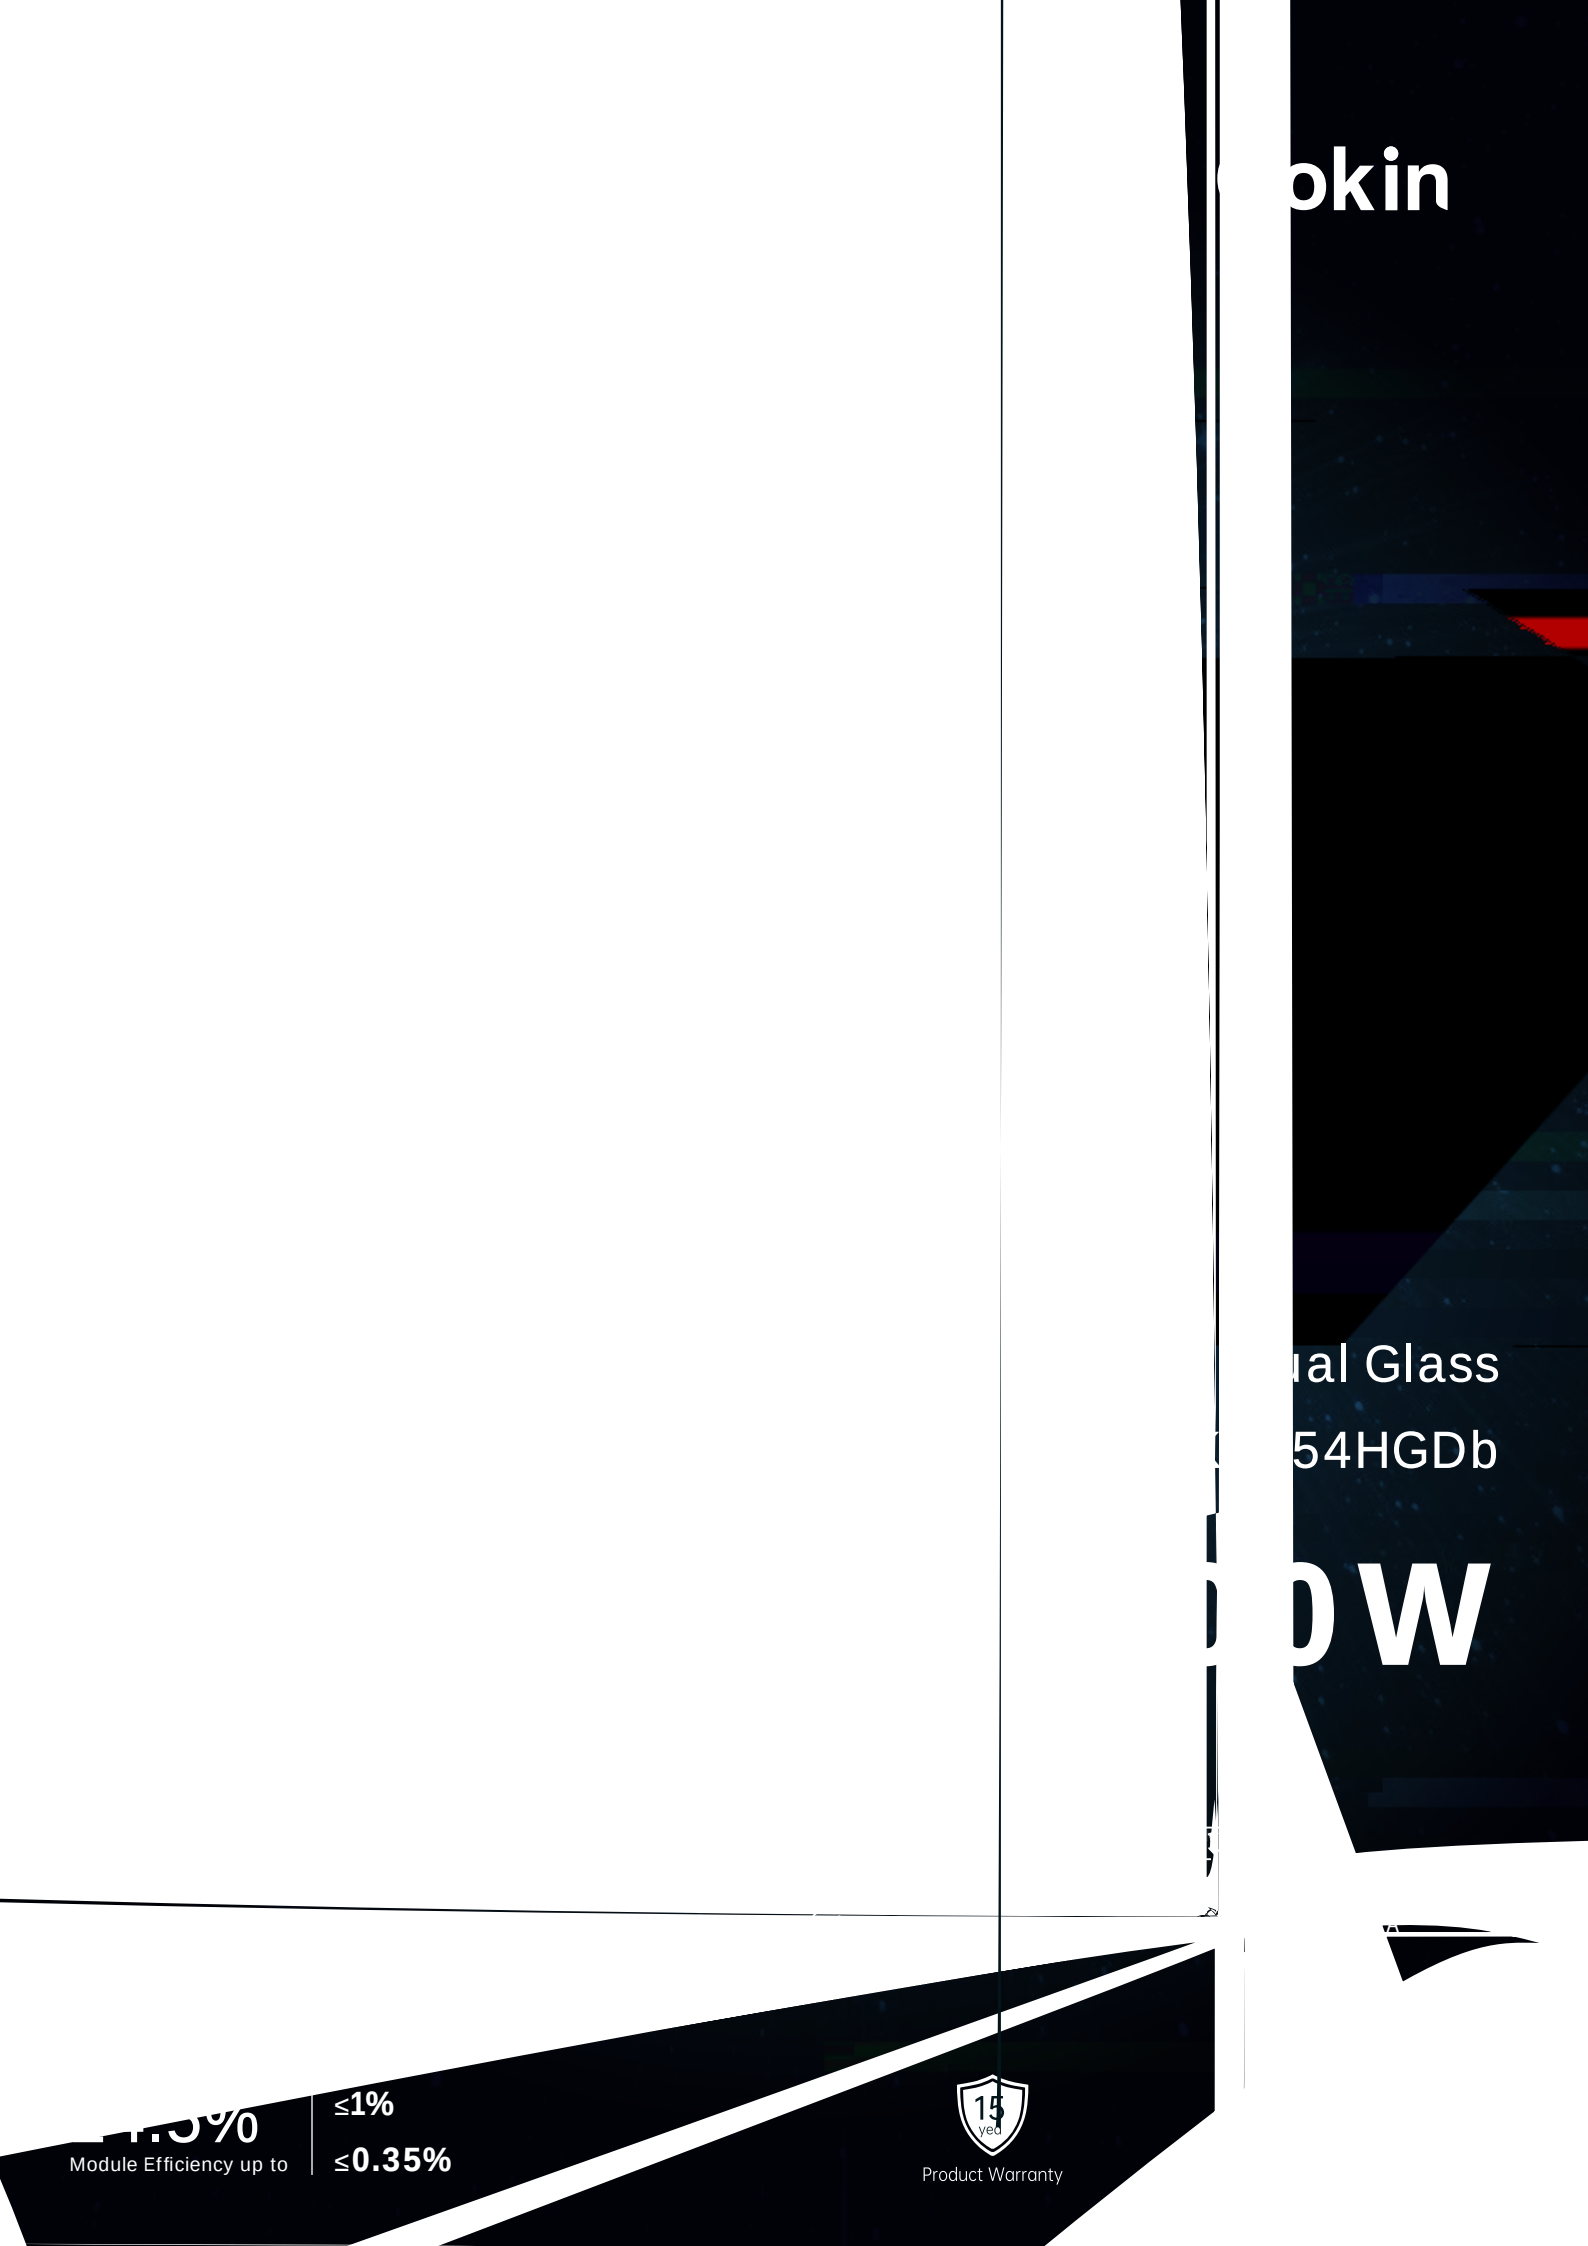
okin
ual Glass
54HGDb
DW
≤1%
≤0.35%
Module Efficiency up to
15
Product Warranty

Maximum Series Fuse Rating

Mechanical Parameters

	108　6×18
	TüV 1×4mm²
	24.8kg (54.67lbs)
	1800×1134×30mm
	MC4 Compatible/MC4-Evo2
	37 pcs per pallet 222 pcs per 20' GP　888 pcs per 40' HC
	Class II
	IEC Class C

Engineering Drawings

Front　　Side　　Back

* L:±2mm　W:±2mm　Unit:mm